
Quiet arrival. Shared recovery.

Nothing-inspired monochrome, functional transparency and tactile industrial finishes.

REVISION 02 / SEPARATE SUITES + CENTRE PASSAGE

CONDITIONAL AREA TEST

Assumes 1,662 sq ft (154.4 m2) is available ground-floor gross area. Actual usable area is unverified.

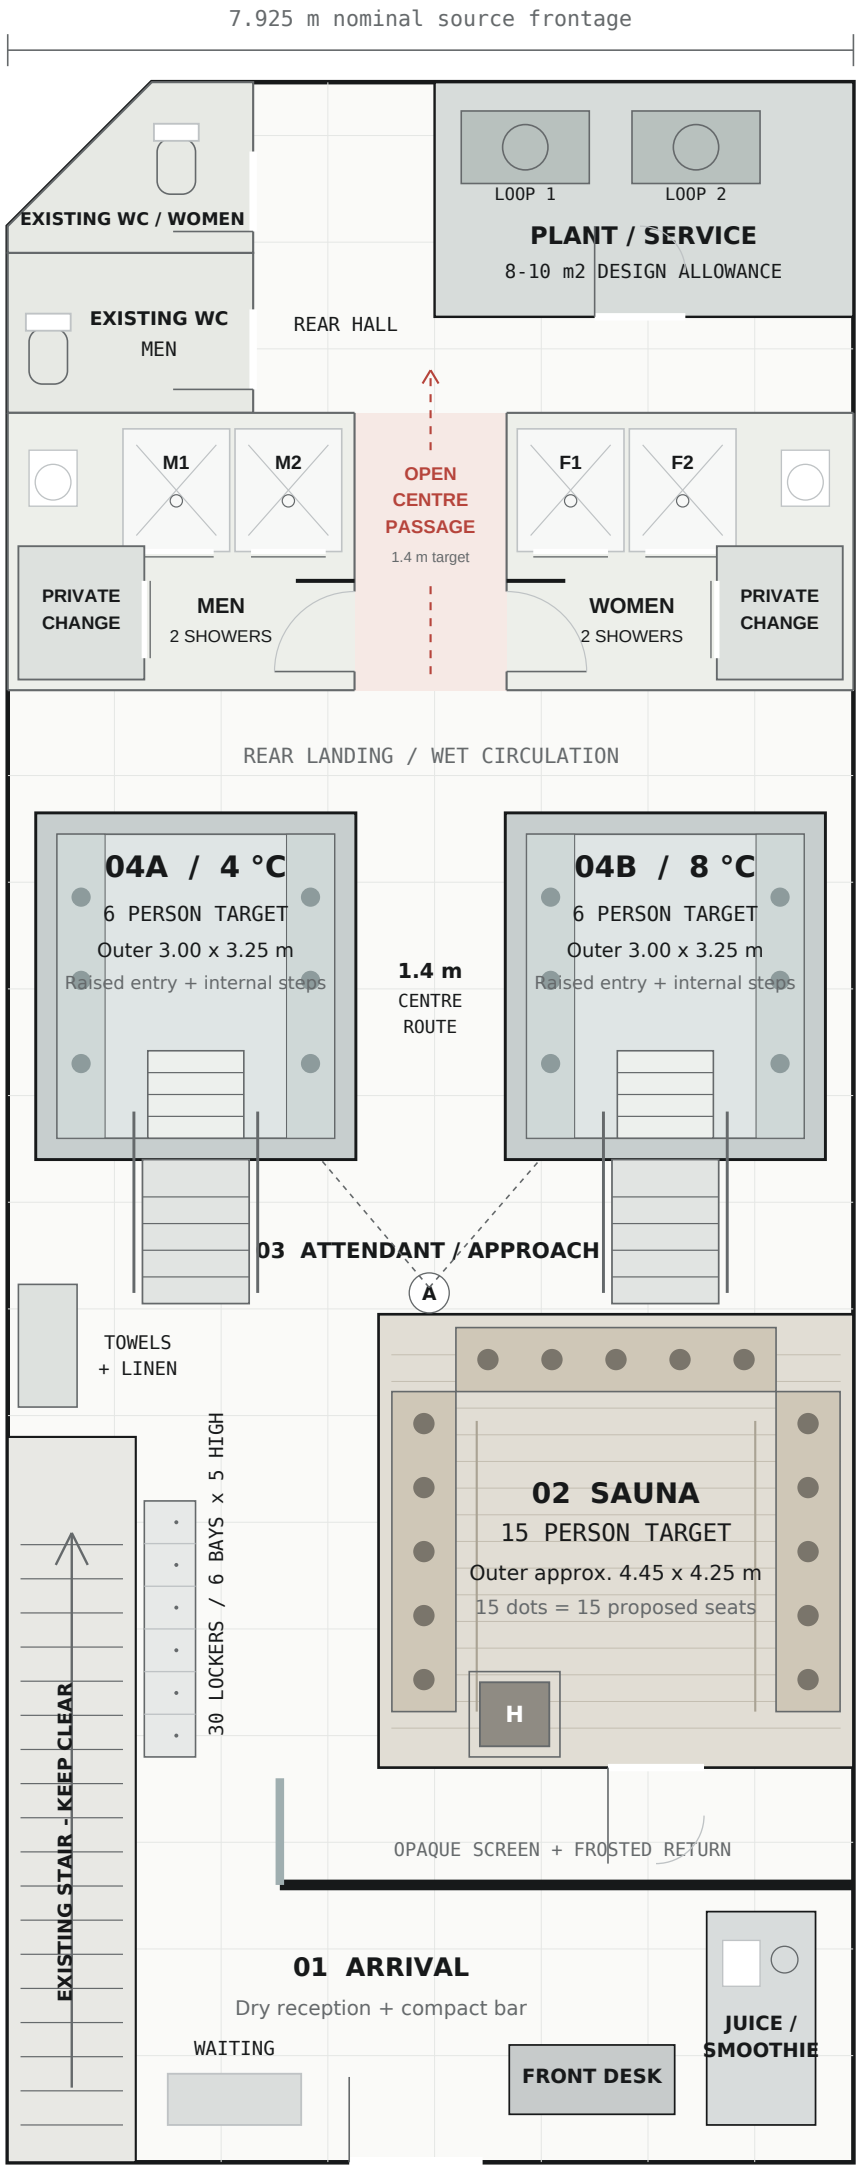

FRONT / CUSTOMER ARRIVAL

FRONT IS AT THE BOTTOM. REAR-LEFT CHAMFER AND STAIR ARE RETAINED IN PRINCIPLE.

Diagram proportions are an illustrative area test, not measured room geometry. WC core, landing, wall thickness and approved exit routes must be surveyed.

PROGRAMME

02	Shared plunge pools / 6 each
15	Sauna seats / target
04	Shower cubicles / 2 M + 2 F
02	Private changing cubicles
02	Existing WCs / M + F
30	Wall lockers / approximate

THE CUSTOMER ROUTE

Arrive at the desk and bar. Turn behind the privacy screen. Use lockers and change; rinse before entering the thermal area. Cycle between sauna and the two shared pools, then rinse and return to the dry lobby.

WHAT THE DESIGN HIDES

The entrance view ends at a quiet opaque plane with a frosted return. Pools and sauna are beyond this turn. A thermal attendant has direct sightlines to both pools; the front desk does not.

FIT IS NOT YET PROVEN

- The original 65 ft dimension includes the front walkway. A 19.5 m indoor length has NOT been established.
- Two 3.00 m pool bodies plus the 1.4 m route consume 7.40 m across a nominal 7.925 m shell. The remainder must absorb walls and edge gaps. Side strips are not customer aisles.
- The bathroom row, existing WC core and clear stair landing are the tightest junction. Their measured fit is unresolved.
- Raised pool entries are shown. Step count, rim height, handrails and landing dimensions require a real section and supplier design.

The design system and delivery gates.

Keep the architecture restrained. Give equipment, water, heat and service access enough space.

REVISION 02 / SEPARATE SUITES + CENTRE PASSAGE

ROOM PROGRAMME / CONCEPT REQUIREMENTS

ZONE	CONCEPT	DESIGN GATE
Arrival + bar	Front desk, compact smoothie preparation, small bench.	Separate food preparation from wet services; retain a clear entrance.
Privacy + lockers	Offset opaque/frosted screen; approximately 30 cubbies.	A turn in the route blocks sightlines. Confirm bag and towel storage sizes.
Sauna	Outer approx. 4.45 x 4.25 m; U-bench seating; 15 target.	Nine usable linear metres of upper seating; corners and heater clearances excluded.
Two shared plunges	Each outer 3.00 m across x 3.25 m deep; 6 target each.	Water bounding box 2.60 x 2.85 m, before integral steps. Show a section for raised entries.
Wet changing	Separate men's and women's suites; two showers, one private changing cubicle and basin in each.	Keep the centre passage clear to the rear hall. Opaque entries and screens; confirm measured fit.
Existing WC core	Two existing toilets labelled male/female.	Retain rear-left position and chamfer; verify exact walls and openings on site.
Plant + storage	8-10 m2 plant allowance; separate clean towel storage.	Two water circuits, heat rejection, filtration, service access and safe chemical storage.
Stair + circulation	Preserve the front-left stair and all required landings.	No equipment, lockers or doors may obstruct required routes. Capacity needs approval.

FINISH LANGUAGE

01 / MATTE MINERAL

Warm-grey, slip-resistant wet-area tile; simple joints and restrained drainage lines.

02 / FROSTED GLASS

Diffuse light with framed translucent partitions. Keep changing areas private and emergency observation practical.

03 / FUNCTIONAL METAL

Brushed stainless steel, graphite framing, exposed fasteners and legible equipment labels.

04 / ANALOG DETAILS

Dot-matrix wayfinding, tactile rotary controls where suitable, monochrome timers and a small status-light accent.

BEFORE DESIGN IS FROZEN

Obtain a measured survey and signed premises scope; confirm the quoted area excludes any public walkway. Coordinate structure, electrical demand, water supply, wastewater, ventilation and fire access. Confirm MBSP activity classification, the proposed beverage preparation and operating conditions. Finalise pool sections, sauna equipment, water treatment and the maximum permitted occupancy with the relevant professionals.

SOURCE + LIMIT

Based on the user-supplied Lot 303 ground-floor plan and stated 1,662 sq ft brief. This document is a conditional spatial and visual concept. It does not certify structure, hygiene, accessibility, fire escape, engineering capacity or planning/licensing approval. The 15 sauna and 6-per-pool figures are design targets. The 27 equipment places do not establish a 27-person studio occupancy.